


PLAN VIEW

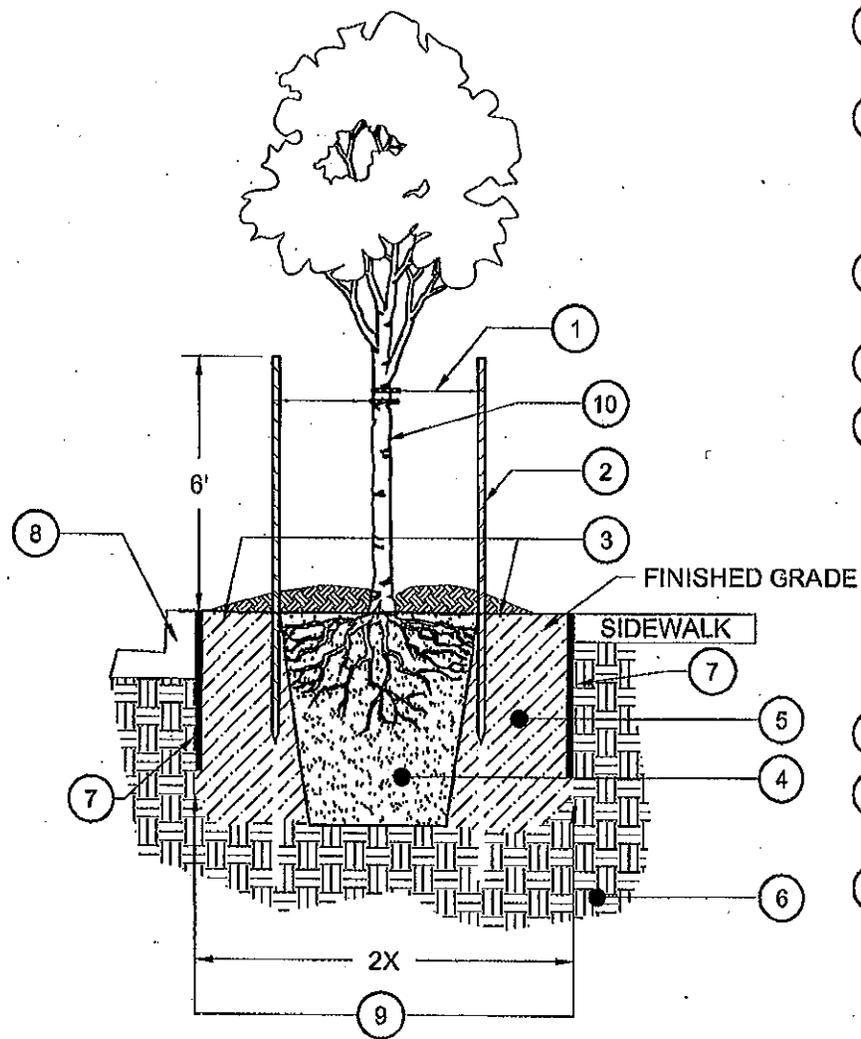

SECTION VIEW

NOTES:

- ① 3/4" WIDE GREEN FABRIC TIES (ARBOR TIE OR APPROVED EQUAL AS APPROVED BY PARKS MANAGER.
- ② 8' GREEN STEEL "T" STAKE - DRIVEN INTO SOIL SO THAT TOP OF "T" STAKE IS AT 6' ABOVE SOIL GRADE, STAKES TO BE PLACED OUTSIDE OF ROOT BALL AND PERPENDICULAR TO PREVAILING WIND OR AS APPROVED BY PARKS MANAGER.
- ③ 2-3" WOOD CHIP MULCH - MINIMUM WIDTH OF ROOTBALL.
- ④ ROOTBALL - TREE ROOT FLARE SHOULD BE EXPOSED AND PLANTED MIN. 2" ABOVE SOIL GRADE.
- ⑤ BACK FILL WITH NATIVE SOIL OR AS APPROVED BY PARKS MANAGER.
- ⑥ UNDISTURBED NATIVE SOIL.
- ⑦ ROOT CONTROL BARRIER BY "DEEP ROOT LLC" OR APPROVED EQUAL AS APPROVED BY PARKS MANAGER. 10' LONG CENTERED TO THE TREE, 24" DEPTH (LB 24-2) ALONG SIDEWALKS AND CURBING. ROOT BARRIER INSTALLATION REQUIRED WHEN TREE LOCATED CLOSER THAN 4' TO ANY HARDSCAPE.
- ⑧ CURB AND GUTTER.
- ⑨ PLANTING HOLE TO BE 2X THE SIZE OF THE ROOTBALL.
- ⑩ ALL TREES TO CONFORM TO ANSI Z60.1 STANDARDS FOR NURSERY STOCK. TREES SHALL BE INSTALLED PER DETAIL HEREON OR AS APPROVED BY PARKS MANAGER.

CITY OF SAN BUENAVENTURA

PUBLIC WORKS DEPARTMENT
ENGINEERING DIVISION

15 GALLON/24" BOX TREE PLANTING DETAIL

STD. DET. NO.
412

APPROVED BY: *Nigel O'Conor*
PARKS MANAGER

APPROVED BY: *[Signature]*
CITY ENGINEER R.C.E. 37084

DATE **3-2-15**

SHEET
1 of 1