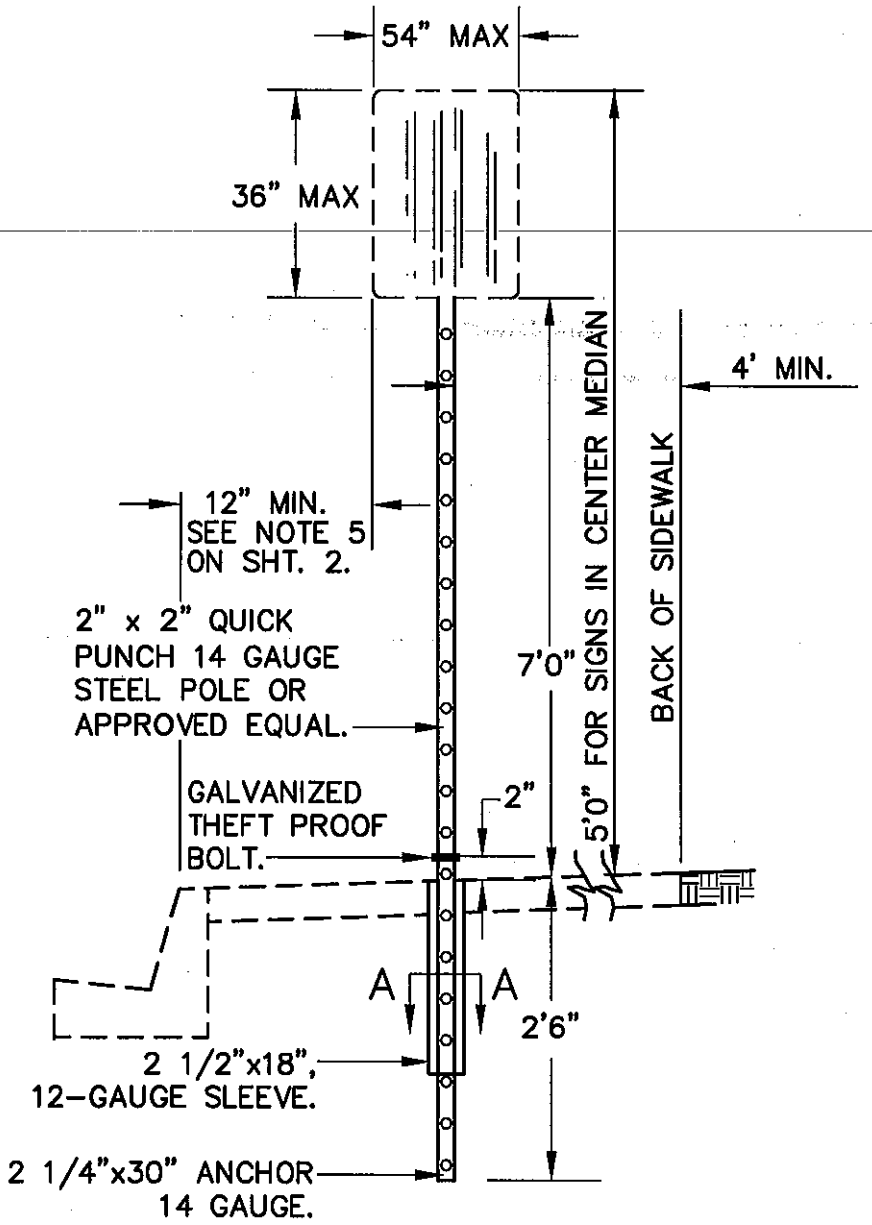



SECTION A–A
NO SCALE

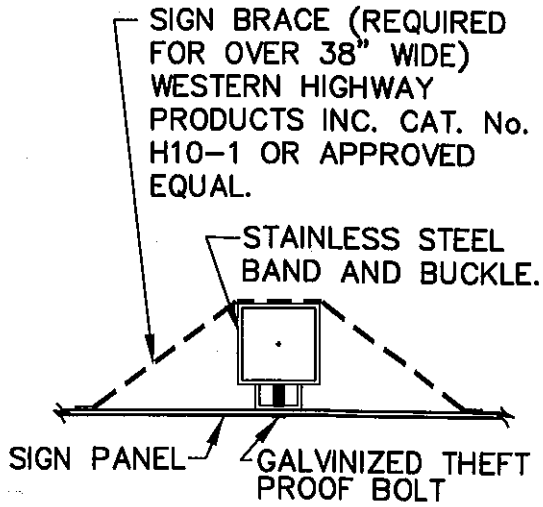

MOUNTING DETAIL
NO SCALE

CITY OF SAN BUENAVENTURA

PUBLIC WORKS DEPARTMENT
ENGINEERING DIVISION

DESIGNED BY: R.D. DRAWN BY: T.N. CHECKED BY: J.S. APPROVED BY: STREETS SUPERINTENDENT	STREET SIGN APPROVED BY CITY ENGINEER R.C.E. 37064 DATE 3-12-01	STD. DET. NO. 119 SHEET 1 of 2

STREET SIGN NOTES

1. GALVANIZED PARTS SHALL BE HOT-DIP GALVANIZED PER SECTION 210-3 OF THE STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION.
2. STAINLESS STEEL STRAPPING BAND SHALL BE 3/4" WIDE AND .020 THICK.
3. SIGNS SHALL BE INSTALLED ON ELECTROLIERS OR LIGHTING FIXTURES WHEREVER PRACTICABLE.
4. SIGNS SHALL BE A OF MINIMUM 4 FEET AWAY FROM FIRE HYDRANTS AND OTHER UTILITES AND NOT RESTRICT PEDESTRIAN TRAFFIC.
5. FOR 5' SIDEWALK ADJACENT TO BACK OF CURB, INSTALL SIGNS AT BACK OF SIDEWALK, OR 12" FROM CURB FACE TO EDGE OF SIGN.
6. JACKHAMMER HOLES IN THE SIDEWALK ARE NOT PERMITTED FOR INSTALLATION OF STREET SIGNS. A CORED HOLE IN THE SIDEWALK IS REQUIRED. THE SIZE OF THE HOLE IS DETERMINED BY THE SIZE OF THE POLE REQUIRED.
7. ALL SIGN PANELS SHALL BE .080" THICK SHEET ALUMINIMUM 6061-T6 GRADE.

CITY OF SAN BUENAVENTURA	PUBLIC WORKS DEPARTMENT ENGINEERING DIVISION	
DESIGNED BY: R.D. DRAWN BY: D.T. CHECKED BY: APPROVED BY: STREETS SUPERINTENDENT	STREET SIGN	STD. DET. NO. 119
	APPROVED BY CITY ENGINEER R.C.E. 37064 DATE 3-12-01	SHEET 2 of 2